

Ref:

SF-100-17W/M-BL-4K-1200-DALI


Item No: ORLINE-100 – 34479

orlight[®]
FROM SOURCE TO SITE

Online-100 is an advanced surface-mounted fixture for commercial settings, with a streamlined linear design and a width of 100mm. Low UGR of less than 16 for enhanced visual comfort. Choose from various lengths to customise your lighting solution. Supplied with an integral driver for simplified installation.



DIMENSIONS

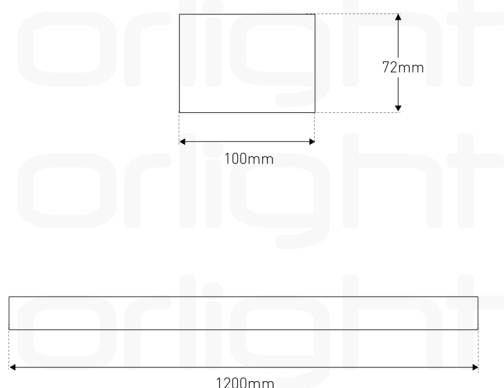

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2740LM
Efficacy	137LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	<16
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	49V
Milliamp / Current	350MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	1200 MM
Width / Depth	100 MM
Height	72 MM
Weight	3.8KG
Diffuser	MICROPRISMATIC
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
IK Rating	IK06
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	INTEGRAL

SF-100-17W/M-BL-4K-1200-DALI

Item No: ORLINE-100 – 34479

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



ADDITIONAL DIMENSIONS

