


Ref:

CL-B280-A12-BL-4K-DALI


Item No: CROSSLINE – 10482

orlight[®]
FROM SOURCE TO SITE

Slim 12 pod LED track mounted bar constructed from Aluminium and finished in Black RAL9005 with an Opal Diffuser. Available in 2700K, 3000K and 4000K colour temperature. CRI >90 for light quality assurance. Slim adjustable 12 pod LED track mounted bar option, constructed from Aluminium and finished in Black RAL9005 with an Opal Diffuser. Available in 3000K & 4000K colour temperature. CRI >90 for light quality assurance.

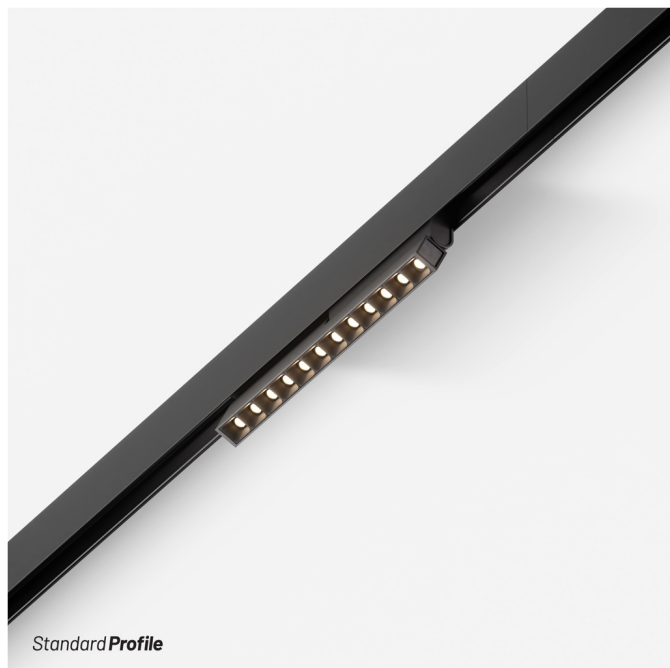

DIMENSIONS

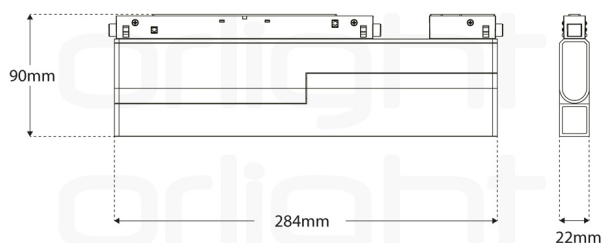

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	1260LM
Efficacy	97LM/W
CCT	4000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	20°
Chipset	OSRAM LED
Chip Life	L70 > 36,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	48V
Control	DALI DIMMABLE

CONSTRUCTION


Installation	TRACK
Construction	ALUMINIUM
Length	284 MM
Width / Depth	22 MM
Height	90 MM
Weight	0.48KG
Tilt	45°
Rotation	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

CL-B280-A12-BL-4K-DALI

Item No: CROSSLINE – 10482

orlight[®]
FROM SOURCE TO SITE


LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



STANDARD DALI TRACK



CL-ST-BL-2M-DALI

10556

Standard DALI Track

SLIM DALI TRACK



CL-SLT-BL-2M-DALI

10552

Slim DALI Track

CL-B280-A12-BL-4K-DALI

Item No: CROSSLINE – 10482

orlight[®]
FROM SOURCE TO SITE


RECESSED/TRIMLESS DALI TRACK



CL-RCT-BL-2M-DALI

10527

Recessed/Trimless DALI Track



CL-RCT-BL-3M-DALI

10528

Recessed/Trimless DALI Track