


Ref:

ORL1551U-SQ-WH-LED-4K-DALI-B-EM


Item No: ORL1551 – 30347

orlight[®]
FROM SOURCE TO SITE

High powered decorative square fixture featuring a Polycarbonate base, opal diffuser and aluminium construction. Integral LED Driver with configurations to accommodate switched, 1-10V, DALI, DSI, Corridor and Push Dim control methods. The fixture is rated to IP65 and is available in a variety of finishes. Microwave detection options available.

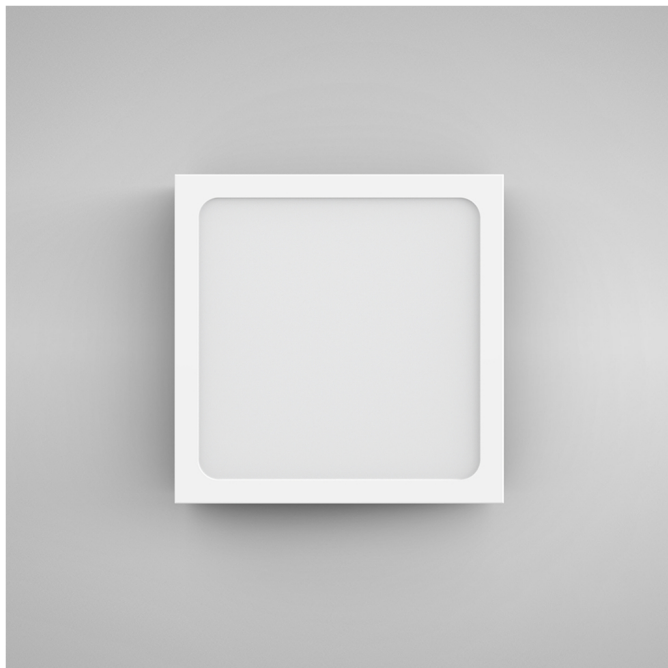

DIMENSIONS

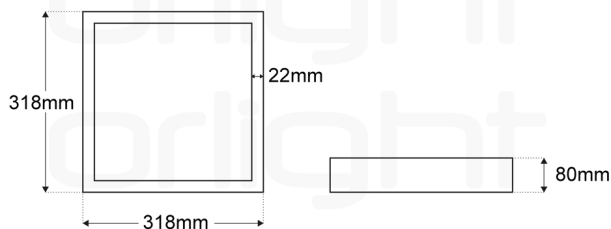

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2400LM
Efficacy	120LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	520MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Length	318 MM
Width / Depth	318 MM
Height	80 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK06
Operating Ambient Temperature	-25°C - +45°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	360LM

ORL1551U-SQ-WH-LED-4K-DALI-B-EM

Item No: ORL1551 – 30347

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

Gear Tray Fixing Details

