

Ref:

ORL1019-S-WH-9016-NL

Item No: ORL1019 – 13147

orlight[®]
FROM SOURCE TO SITE

Directional architectural downlight featuring an anti-glare baffle and magnetic lamp change mechanism. 360 Degree rotation and tilt capability with slim line construction allowing for applications with restricted recess depth. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	58
-----	----


CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	42 MM
Cutout	78 MM
Weight	0.134KG
Tilt	25°
Rotation	360°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL1019-S-IP20  CIRCULAR CUT OUT: 78mm **25° Tilt ADJUSTABLE**

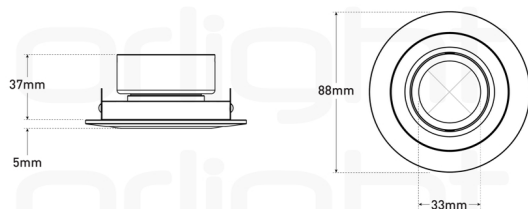

ORL1019-S-WH-9016-NL


Item No: ORL1019 – 13147

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS


ORL1019-S-IP20 with **LED ENGINES**  CIRCULAR CUT OUT: 78mm

ADJUSTABLE - 25° Tilt
Allow +5mm for Cable Clearance

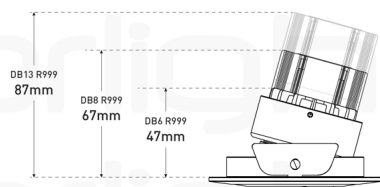

ORL1019-S-IP20 with **GU10 LAMPS**  CIRCULAR CUT OUT: 78mm

ADJUSTABLE - 25° Tilt
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL1019-S-WH-9016-NL

Item No: ORL1019 – 13147

orlight[®]
FROM SOURCE TO SITE




DB13-R999

ACCESSORIES




MC2-SL-WL

11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



LOUVRE-HC

11753
Honeycomb Louvre



ORL1009-1019-SCOVER

12856
Silicone Cover for ORL1009 & ORL1019