

Ref:

SOLSTICE-MINI-8W-WH-4K

Item No: SOLSTICE – 45030

orlight[®]
FROM SOURCE TO SITE

High-performance solid-state adjustable LED downlight with high CRI for accurate colour rendering. Featuring a compact aluminium body, matte white finish and low-glare optics for precise directional lighting.



NEW!


DIMENSIONS

SOLSTICE-MINI



350° Rotation

30° Tilt

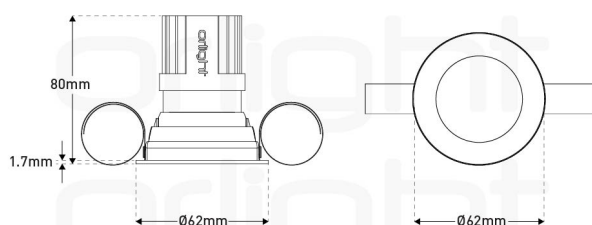

OPTICAL PERFORMANCE

Wattage	8W
Lumen Output	952LM
Efficacy	119LM/W
CCT	4000K
CRI	CRI > 95
Binning	2 STEP MACADAMS
Beam Angle	12° / 24° / 36° / 55°
Chipset	BRIDGELUX

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	180MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	62 MM
Height	80 MM
Cutout	55 MM
Tilt	30°
Rotation	350°
Finish	MATT WHITE
RAL	RAL 9010
IP Rating	IP54

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE


SOLSTICE-MINI-8W-WH-4K

Item No: SOLSTICE – 45030

DRIVER CONFIGURATION

DIMMING	DRIVER	CODE
Switched	BRSDR-SW-180MA	22237
Switched	DOMINO-180MA-DR-DIM	21972
Mains Dimmable	DOMINO-180MA-DR-DIM	21972
DALI	ORL-DALI-NFC-15CC-180MA	33565
DALI	MAXDR-MINI-180MA	22248

SWITCHED



BRSDR-SW-180MA
22237
Switched Driver



DOMINO-180MA-DR-DIM
21972
Switched & Mains Dimmable Driver

MAINS DIMMABLE




DOMINO-180MA-DR-DIM
21972
Switched & Mains Dimmable Driver

DALI



ORL-DALI-NFC-15CC-180MA
33565
NFC Programmable 15W CC 180mA DALI Driver



MAXDR-MINI-180MA
22248
Mini 1-10V/DALI & Push Dimming Driver