


Ref:

ORLLM760-S-SS-2700K


Item No: MEDIO – 15003

orlight[®]
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package and 35 degree beam option. Marine Grade 316 Stainless Steel construction rated to IP68 & integrated lens for asymmetric emission . Recessed light source and black baffle serve to minimise glare. Product footprint of 60mm diameter ensures versatile application. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.

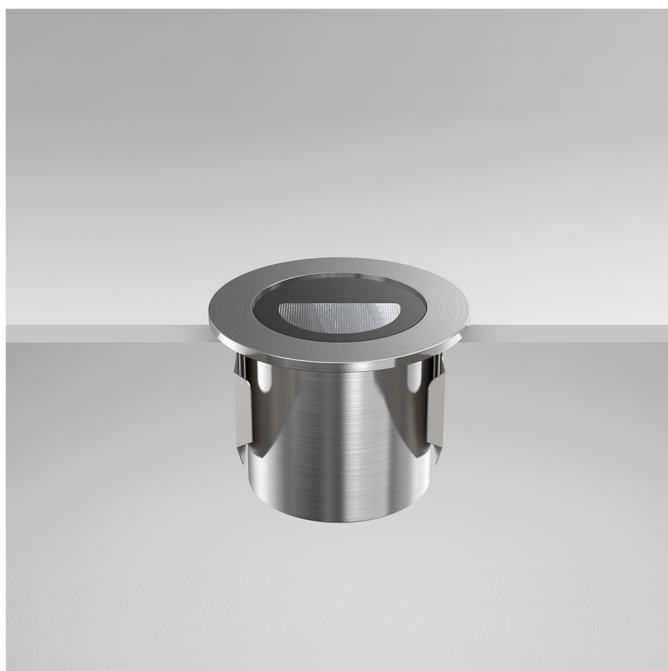

DIMENSIONS

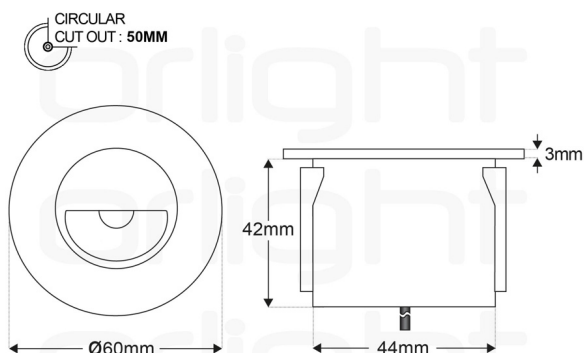

Cable Length: 3000mm

OPTICAL PERFORMANCE

Wattage	1W
Lumen Output	52LM
Efficacy	52LM/W
CCT	2700K
CRI	CRI > 82
Binning	2 STEP MACADAMS
Beam Angle	45°
Chipset	CREE
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	3V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	3000MM


CONSTRUCTION

Installation	RECESSED
Construction	STAINLESS STEEL
Diameter	60 MM
Width / Depth	44 MM
Height	42 MM
Cutout	50 MM
Weight	0.465KG
Finish	316 MARINE GRADE
IP Rating	IP68
IK Rating	IK07
Operating Ambient Temperature	-20°C - +45°C

ORLLM760-S-SS-2700K

Item No: MEDIO – 15003

LIGHT DISTRIBUTION




DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	8
Switched	IP42	ORLRPV350-35-APC	15230	10	30
Switched	IP66	ORLRPV350-35-APC-IP66	31555	10	30
Mains	IP20	ORLRPV20D-350MA	46595	1	13
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	15
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	2	13

PLEASE NOTE:


This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORLLM760-S-SS-2700K

Item No: MEDIO – 15003

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP68)



ORLRPV350CC

15231

Constant current 350mA Driver

MAINS (IP20)



ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver

ORLLM760-S-SS-2700K

Item No: MEDIO – 15003

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



ACCLMTS116

10306

Inground Tube for LM760 Range