


Ref:

ORLRPVALUHS-S1817-3M

Item No: PROTRIM – 15288

orlight[®]
FROM SOURCE TO SITE

Recessed linear profile dedicated to the Orlight Linear LED Solution. The profile features aluminium construction with a white finish, ideal for heat dissipation. Diffuser designed to eliminate LED trail. Fixing clip mechanism with 3M foam adhesive for ease of installation.

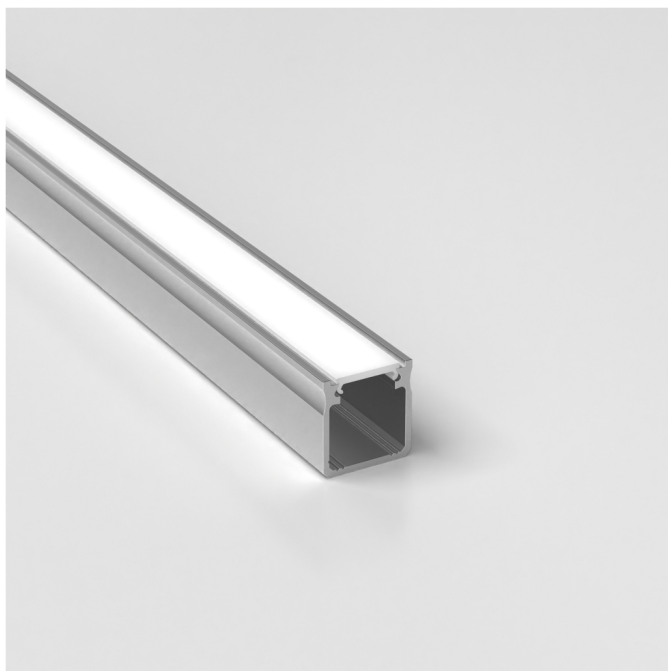


OPTICAL PERFORMANCE

LOR	70
-----	----

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM & OPAL
Length	3000 MM
Width / Depth	17 MM
Height	18 MM
Finish	ALUMINIUM
IP Rating	IP20

DIMENSIONS

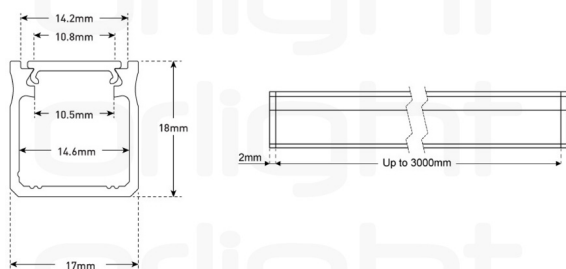

ORLRPVALUHS-S1817-3M

Item No: PROTRIM – 15288

orlight[®]
FROM SOURCE TO SITE

EVO



24V EVO CRI90

EVO4



IP RATED