


Ref:

VEGA-UD-BL-3000K


Item No: VEGA – 17234

orlight[®]
FROM SOURCE TO SITE

Surface mounted wall light finished in RAL9005 matt black and curved sides gives a seamless structure. Constructed to IP54 this fixture provides a downwards light distribution. Integrated LED power supply unit allows for a direct 240V input facilitating ease of installation.

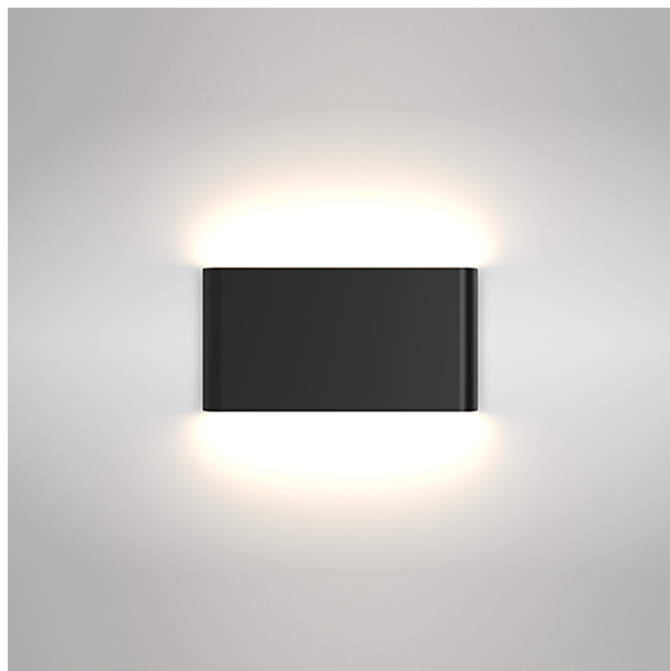

DIMENSIONS

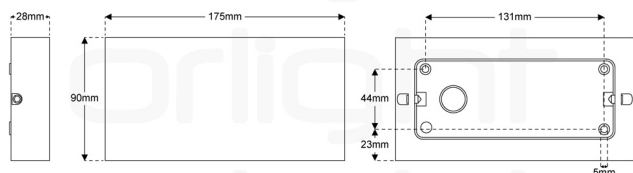

OPTICAL PERFORMANCE

Wattage	9W
Lumen Output	902LM
Efficacy	100LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	80°
Chipset	SMD 2835
Chip Life	L80 > 86,000HRS

ELECTRICAL

Voltage	240V
Milliamp / Current	320MA
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	175 MM
Width / Depth	28 MM
Height	90 MM
Weight	0.55KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP54
Operating Ambient Temperature	-20°C - +40°C

VEGA-UD-BL-3000K

Item No: VEGA – 17234

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

