

Ref:

AXIAL-130-BL-25W-4K-DALI-B-EM

Item No: AXIAL IP65 – 32540

orlight[®]
FROM SOURCE TO SITE


External IP65 solid-state surface mounted downlight with a black matte finish, supplied with an integral driver and a remote emergency option with battery pack. Mounts easily using a BESA box. An IP20 variant is also available for indoor use.



UGR
< 19

IP65

DIMENSIONS

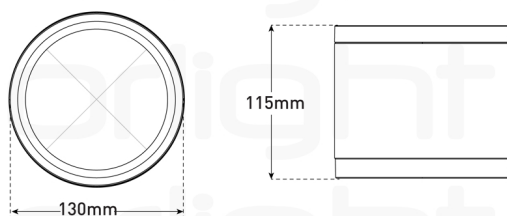

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	2386LM
Efficacy	95LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	36°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	200-240V
Milliamp / Current	550MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING MOUNTED
Construction	ALUMINIUM
Diameter	130 MM
Height	115 MM
Weight	0.92KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
IK Rating	IK08
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	286LM

AXIAL-130-BL-25W-4K-DALI-B-EM

Item No: AXIAL IP65 – 32540

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

