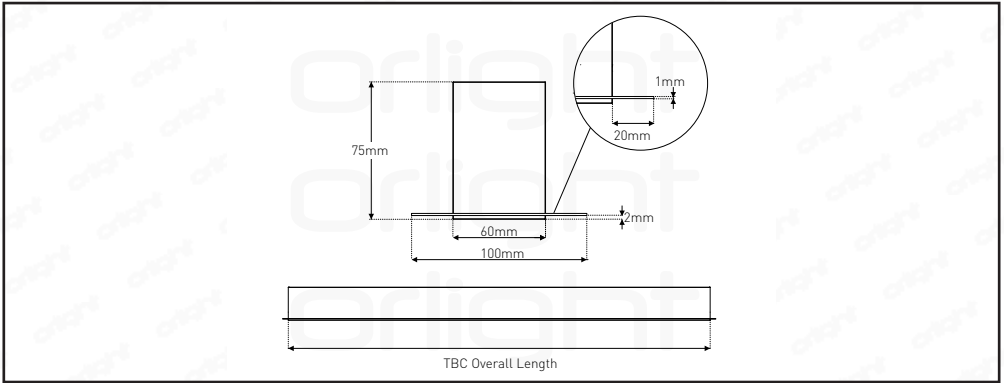


- 1) Mark surface area and create desired cut-out.
- 2) Remove diffuser using a sucker pad.
- 3) Squeeze both gear tray clips to release gear tray.
- 4) Feed mains supply through cable entry and connect to the terminal block.
- 5) Insert fitting into cut-out. Affix to the appropriate position by tightening wall brackets screws.
- 6) Inspect fitting, connections and all contacts before plaster in preparations.
- 7) Ensure the fitting is firmly in place before plastering over trimless sections.
- 8) Re-attach diffuser and peel protective layer off.
- 9) If two sections require connecting, using internal joining clips, feed the loop around the fixed ring (A) and push down on the lever (B) to lock securely. Once connected, continue from step (2).

This product must be installed by a skilled or instructed person in accordance with the current edition of the IET Wiring Regulations BS 7671 "Requirements for Electrical Installations" and the Buildings Regulations, as may be applicable subject to the location and country of the installation.

Should this product be modified, misused or not installed as per the instructions given, the product warranty shall be rendered void.

All information contained within these installation instructions manual is provided in good faith. Orlight shall not be held responsible for any losses incurred as a result of the Customer's failure to follow the instructions manual thoroughly and in its entirety or failing to inspect the product for missing parts and/or any defects prior to installation.

For full Terms and Conditions, please visit our website at:
<https://www.orlight.com/en/terms-and-conditions.html>

Hole Cut Out:

Orlight does not recommend cutting of holes prior to receipt of product in hand. Please refer to reverse or Orlight's technical support/website for recommended hole cut out.

Wiring:

Disconnect the mains supply before installation. Ensure that the unit is installed and maintained by a certified professional and that installation conforms to any local building control standard applicable.

Accessories:

Please ensure that any accessory used in conjunction with these products is approved by Orlight. Failure to do so will void any product guarantee. Orlight will not be held responsible for any loss incurred be it direct or consequential.

NOTE – Light fittings in general can become hot whilst in operation. It is advisable that they do not come into contact with any flammable materials such as fabrics, furniture, soft furnishings or touched during/after operation.