

Ref:

ORIONWFX-13W-WH-WH-4K


Item No: ORION – 27999

orlight[®]
FROM SOURCE TO SITE

Orion Round Wall Wash fixture combines thermal management with a LED chipset to enable superior performance with a passive cooling system. Aluminium construction with secondary wall wash reflector. CRI>90 for light quality assurance, consistency is adhered to with a 2-Step MacAdams Ellipse binning strategy. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

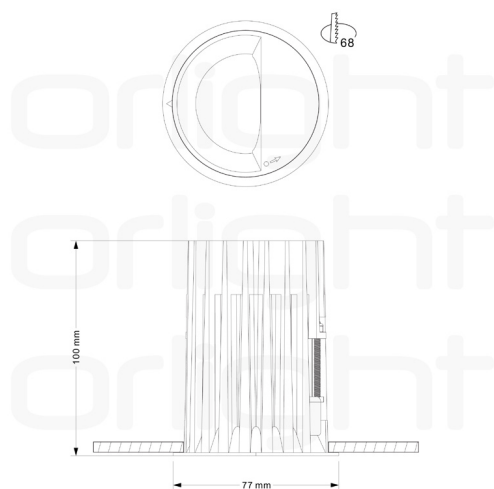

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	858LM
Efficacy	66LM/W
CCT	4000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	WALL WASHER°
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	77 MM
Height	100 MM
Cutout	68 MM
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20

EMERGENCY


Emergency Configuration	REMOTE
-------------------------	--------

ORIONWFX-13W-WH-WH-4K

Item No: ORION – 27999

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



REFLECTORS



ORIONWFX-REFLECTOR-MTS
28000
Orion Wall Wash Reflector for ORIONWFX



ORIONWFX-REFLECTOR-BL
28001
Orion Wall Wash Reflector for ORIONWFX